





Fabrication standard
 Nez et fond inox 304L
 Cartouche de nez démontable 316L
 Tube inox 304L
 Tige inox Chromée 304L
 Tirants inox 304L

Fixation Plaque avant : OTAV

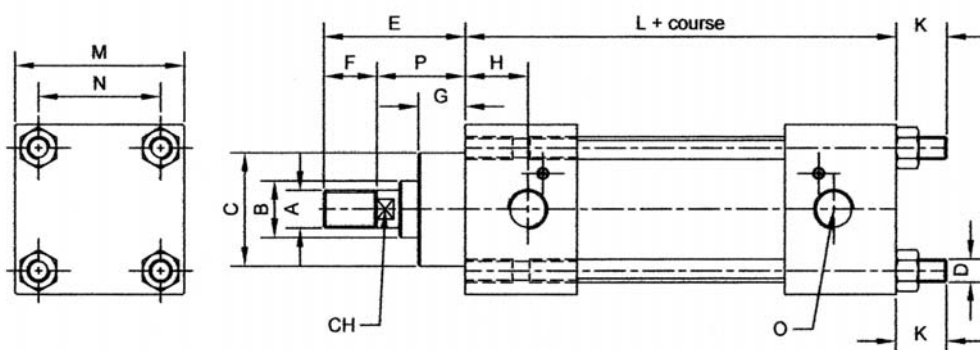

Fixation plaque arrière OTAR

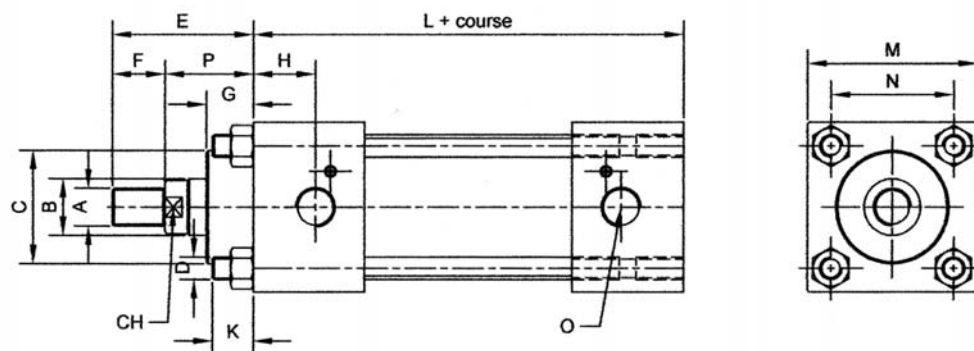

Alésage	A	B	C	D	E	F	G	H	L+	M	N	O	P	CH	AM
40/18	M14x1,50	18	42	M10	43	18	25	30	128	65	46	1/2	25	16	20
40/22	M20x1,50	22	42	M10	76	28	31	30	128	65	46	1/2	25	17	20
50/22	M20x1,50	22	42	M10	76	28	31	30	133	75	53	1/2	48	17	20
63/30	M20x1,50	30	60	M10	75	28	25	24	131	90	65	1/2	47	24	20
80/30	M20x1,50	30	60	M16	75	28	25	32	159	114	84,5	1/2	47	24	25
80/40	M33x2,00	40	72	M16	67	36	14	32	159	114	84,5	1/2	47	32	25
100/40	M33x2,00	40	72	M16	67	36	14	40,5	170	135	99	3/4	31	32	25
100/56	M42x2,00	56	85	M16	107	50	35	40,5	170	135	99	3/4	31	47	25

CH = Dimensions sur plat
 AM = longueur d'amortisseur

D = Orifices taraudés long utile mini 1,5 x D
 K = Longueur des tirants selon construction